


Connect smart phone for testing



Connect tablet/laptop for testing

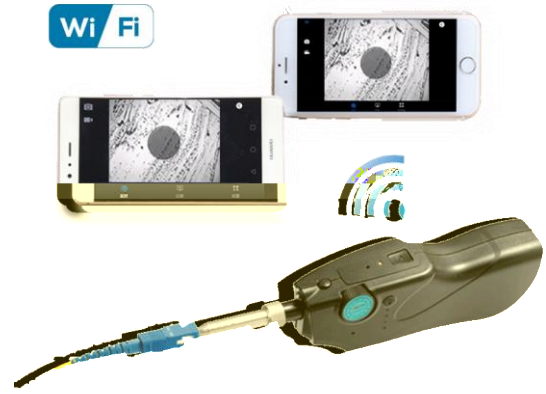

Specifications

Model	OCI-20BN-W
Magnification	400X
Definition	<
Light source	Blue LED
View of field	X: 0.3487 Y: 0.2632 mm
Focus wheel	Single-way
Focus speed	1-5s
Alignment	>98%
Capture button	Available
Quick switch	Wi-Fi/USB
Connector	Micro USB
Connectivity	Wi-Fi802.11/USB2.0
Frequency band	2.4GHz
OS compatibility	Android 4.4 and above IOS8.1 and above
Voltage	5V
Power support	3400mAh Li-ion

Working time	5h
Recharge time	5h
Weight/Dimension	175g / 19x5x3cm

* Specifications subject to change without notice

Configuration

Items	Description	Quantity
Probe	To test the fiber end face on patch cords / connectors in patch panels, etc.	1pcs
Standard Tips	AC-OCI-B-2.5PC-M, AC-OCI-B-FC-F, AC-OCI-B-SC-F, AC-OCI-B-LC-F	1 pcs/type
USB cable	USB to Micro USB cable For charging or data transfer	1pcs
Soft case	For carrying the probe and accessories	1pcs
Application	FiberEye2 on Android & IOS	
USB AC adapter(optional)	5V 1A charger	
USB adapter(optional)	USB-C to USB-A adapter, applicable for USB2.0 and USB3.1 OTG smart devices	
Arm strap(optional)	Outdoor arm strap holding Mobile Phone	
Software(optional)	EFD end face data analysis software, free upgrade.	

Note: Packing and color may change without prior notice.